


SL

SL700 Series

Scale unit

Magnescape® Digiruler®


- Compact ribbon type scale for easy mounting in cramped spaces
- Non-contact detection
- Magnetic detection system with excellent resistance to dust, oil, vibrations and shocks.
- Effective length from 50mm to 100mm
- Detects linear displacement and produces analog or AB quadrature signal output when connected to PL101 head and MJ500/600/620 Series interpolator (both sold separately).
- Three types are available with different reference point specifications.

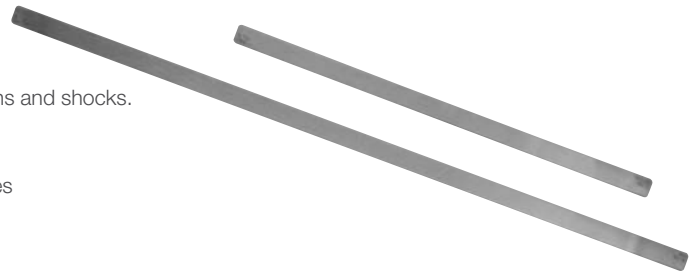

Example for connection


Scale	Head	Cable	Interpolator
SL700	PL101	CE08	MJ500/600/620/700 MJ820/821 MJ830/831

Dimensions

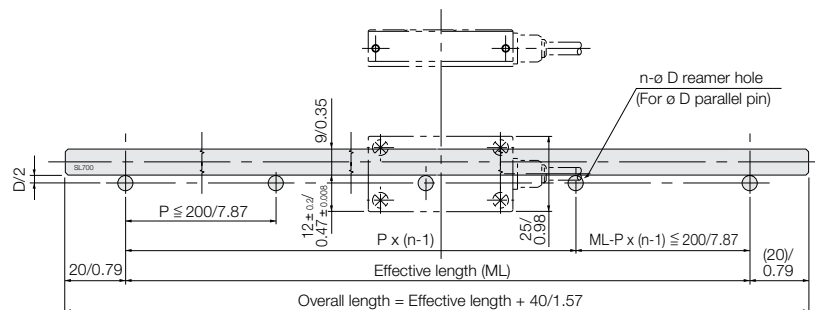

*Scale thickness 0.3 mm max. (Include double stick tape)
 *Mount the scale on the non-magnetic material. When mounting on a magnetic material, insert a non-magnetic layer with a thickness of at least 3mm.


Reference mark

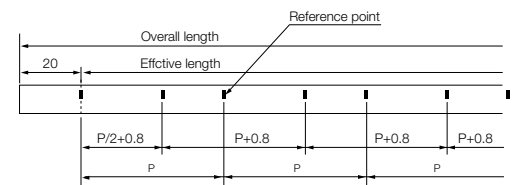

Reference mark pitch(p)	Effective length (mm)
80 mm	200 < ML ≤ 2000
160 mm	2000 < ML ≤ 12000
320 mm	12000 < ML ≤ 56000
480 mm	56000 < ML ≤ 100000

Unit : mm/inch

Configurations

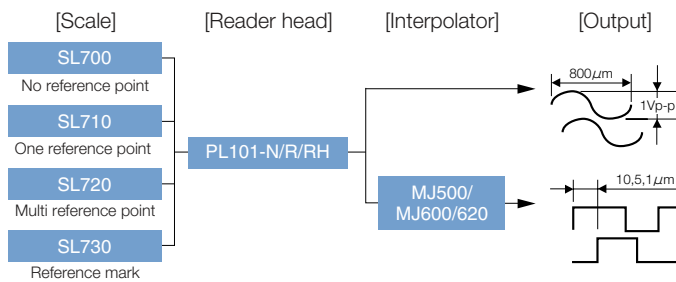

The relation of Effective length (L) and factor N

L : m	N	L : m	N	L : m	N	L : m	N
3 < ML ≤ 5.5	1	28 < ML ≤ 30.5	11	53 < ML ≤ 55.5	21	78 < ML ≤ 80.5	31
5.5 < ML ≤ 8	2	30.5 < ML ≤ 33	12	55.5 < ML ≤ 58	22	80.5 < ML ≤ 83	32
8 < ML ≤ 10.5	3	33 < ML ≤ 35.5	13	58 < ML ≤ 60.5	23	83 < ML ≤ 85.5	33
10.5 < ML ≤ 13	4	35.5 < ML ≤ 38	14	60.5 < ML ≤ 63	24	85.5 < ML ≤ 88	34
13 < ML ≤ 15.5	5	38 < ML ≤ 40.5	15	63 < ML ≤ 65.5	25	88 < ML ≤ 90.5	35
15.5 < ML ≤ 18	6	40.5 < ML ≤ 43	16	65.5 < ML ≤ 68	26	90.5 < ML ≤ 93	36
18 < ML ≤ 20.5	7	43 < ML ≤ 45.5	17	68 < ML ≤ 70.5	27	93 < ML ≤ 95.5	37
20.5 < ML ≤ 23	8	45.5 < ML ≤ 48	18	70.5 < ML ≤ 73	28	95.5 < ML ≤ 98	38
23 < ML ≤ 25.5	9	48 < ML ≤ 50.5	19	73 < ML ≤ 75.5	29	98 < ML ≤ 100	39
25.5 < ML ≤ 28	10	50.5 < ML ≤ 53	20	75.5 < ML ≤ 78	30		

Specifications

Model	SL700	SL710	SL720	SL730
Reference point	No reference point	One point (Specify the position when ordering) (1 mm unit)	Multi point 60mm pitch from left effective length end	Reference mark (Refer to figure below)
Reference point position accuracy	-	± 1 mm	± 1 mm Pitch accuracy ± 7 µm	± 1 mm Pitch accuracy ± 7 µm
Effective length (L)*	50mm to 100mm		100mm to 100mm	200mm to 100mm
Overall length	L+40mm			
Accuracy (20 °C)	± 10L µm (L ≤ 3m) ± (10L+2.5N) µm (L > 3m) *In combination with PL101 series *L Measuring length *Refer separate table			
Reproduced wave length	800µm			
Single mass	15 g/m			
Linear expansion coefficient	(14 ± 1) × 10 ⁻⁶ / °C (Scale unit)			
Operating temperature	0 to 45 °C / 32°F to 113°F			
Storage temperature	-20 to 50 °C / -4°F to 122°F			
Standard compliance	EMI: EN55011 Group 1 Class A EMS: EN50082-2 FCC Part 15 Subpart B Class A ICES-003 CLASS A DIGITAL DEVICE			

*L ≤ 1,000mm: 50mm pitch 1,100 ≤ L ≤ 3,000mm: 100mm pitch 3,500 ≤ L ≤ 10,000mm: 500mm pitch 11,000 ≤ L: 1,000mm pitch